

DESCRIPTION

4" square recessed trimless showerlight fixture. U.L. listed for wet location. For use with 12V MR16 lamp 37W max. or CMHMR16 20W or 39W.

For use in downlighting applications in damp or wet locations.

Catalog #		Type
Project		
Comments		Date
Prepared by		

SPECIFICATION FEATURES

A...Trimless Fixture

Square trimless showerlight fixture. Includes bullet plunger retainers for smooth snap-in action during installation and removal of trim for relamping. Helps guard against plaster cracking.

B...Lamp

For use with 12V MR16 lamp 37W max. or CMH MR16 20W or 39W. Lamp not included. Solite soft focus lens included. Lens is secured with tensions springs which allow the lens to retract for access to remove the trim for relamping. The springs ensure that the lens re-seals itself against the gasket after maintenance. Fixture can accept up to one (1) optical accessory.

C...Socket


Posi-Grip bi-pin socket for 12V MR16. GX10 for metal halide lamps. (Included with Quiet Ceiling Housing sold separately)

D...Finish

Trim face is powder coated in white, black, industrial silver, stainless steel or primer finish for painting in existing ceiling color. All other internal components are flat black.

E...Safety

Steel safety cable provided. Attaches to tab inside housing to prevent falling during maintenance or as a result of accidental dislodging of the trim.

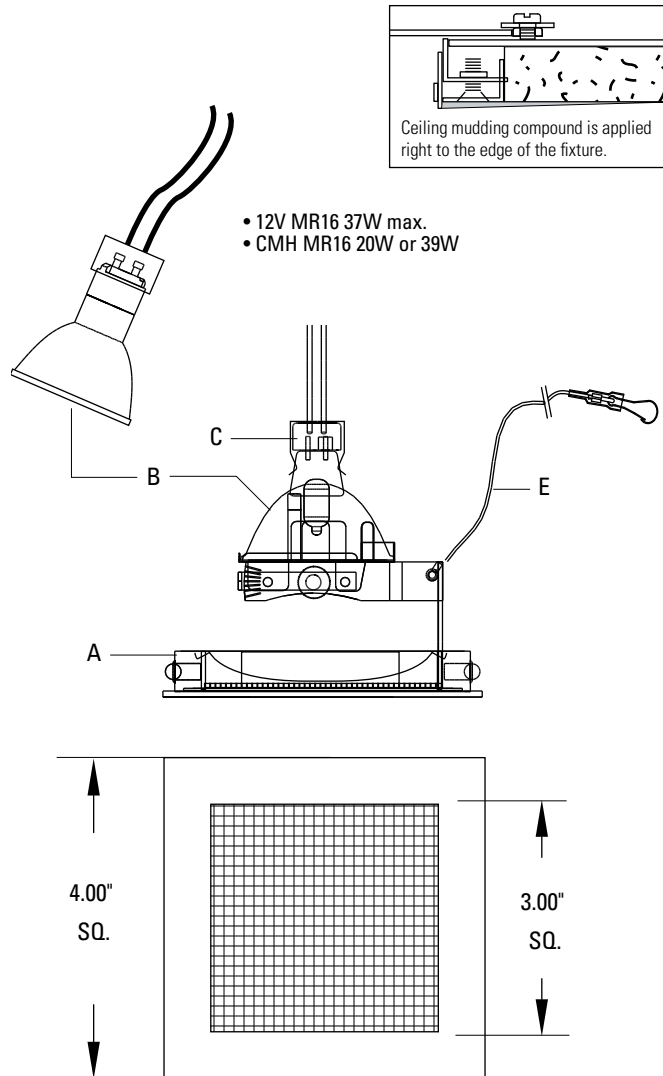

Ceiling mudding compound is applied right to the edge of the fixture.

- 12V MR16 37W max.
- CMH MR16 20W or 39W



QUIET CEILING TRIMLESS

QCT1876 4" Square Trimless Recessed Showerlight Fixture

FOR 12V MR16 37W max.
CMH MR16 20W or 39W

Compatible Housings:

QCT901 / QCT901MH

QCT903IC / QCT903ICMH

QCT905RM / QCT905RMMH

QCT907SP / QCT907SPMH



Wet Location

ORDERING INFORMATION

QCT1876	
Fixture QCT1876 = 4" Square Trimless Showerlight Fixture for 12V MR16 or CMH MR16	Finish WH = White BK = Black S = Industrial Silver SS = Stainless Steel (painted) PM = Primer